


Forndlock

圆柱拉紧锁
compression cam latch


C8-1550 compression cam latch




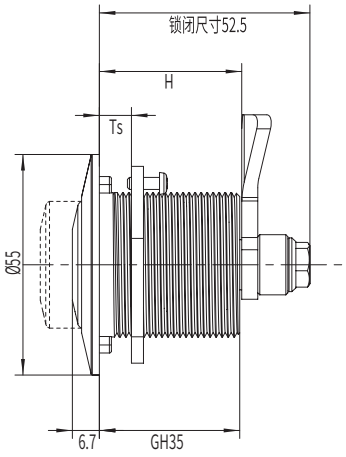




锁芯钥匙 Lock cylinder key



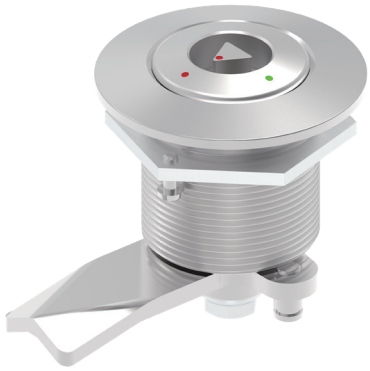



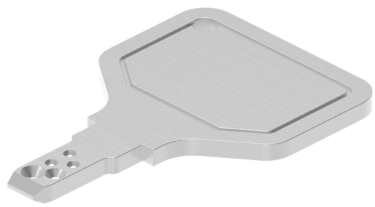

锁芯 Cylinder



E137 E147 E188 E648 E110

选型 Model selection

锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304

C8-1550-SX-LH-A1L

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate



顺时针锁紧
Clockwise locking

逆时针锁紧
Lock counterclockwise

1.Material and surface treatment:
Main body, Steel bolt: SUS304 or SUS316
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP54
Ultimate load: 700N

3. Installation instructions:
Fixed screw torque 8N. M
Applicable door panel thickness: 1-25mm

1.材质及表面处理:
主体,钢栓: SUS304 或 SUS316
密封圈: EPDM发泡胶。

2.性能参数:
防护等级: IP54
极限载荷: 700N

3.安装说明:
固定螺丝扭矩 8N.M
适用门板厚度: 1-25mm

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM