


Handle E-3225

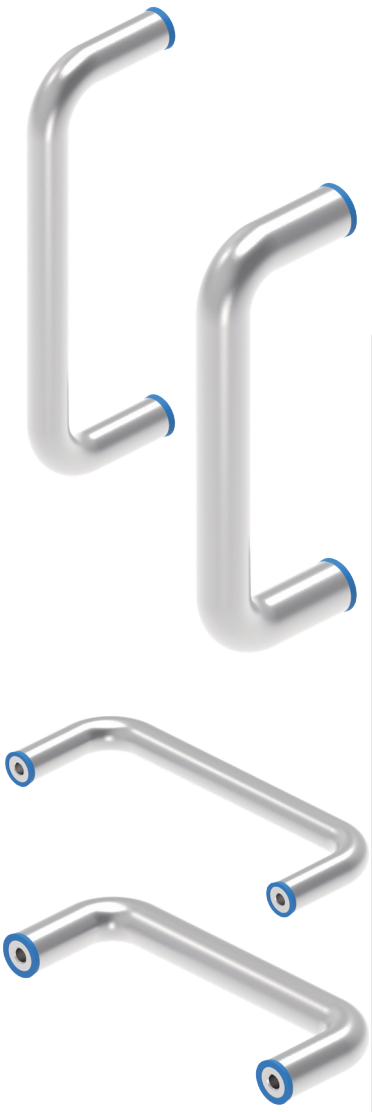

∅ 12 U型把手

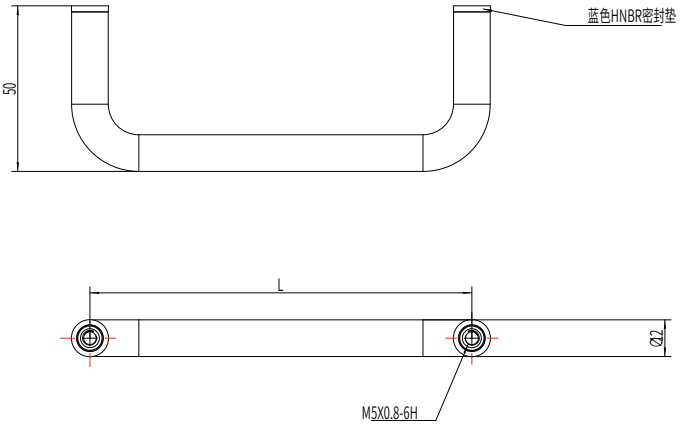

∅ 16 U型把手

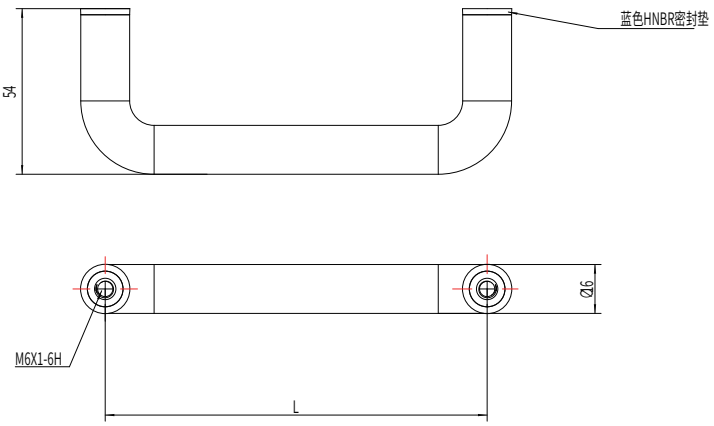

选型 Model selection

12. 直径∅ 12mm
Diameter ∅ 12mm
16. 直径∅ 12mm
Diameter ∅ 16mm

125. 孔中心距 125mm
125.The center distance between holes is 125mm
160. 孔中心距 160mm
160.The center distance between holes is 160mm
200. 孔中心距 200mm
200.The center distance between holes is 200mm

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2represents SUS316

E-3225-12X-LLL-A2

1. M5x0.8 螺纹 Screw thread
2. #10-32 UNF（螺距 0.794）
3. M6x1 螺纹 Screw thread
4. 1/4-20 UNC（螺距 1.270）

1.Material :SUS316L
2.Surface Treatment: Mirror polishing
3.Color: Bright Thread
4.Sealing Material: Blue rubber
5.Protection Grade: IP69K

1.材质 :SUS316L
2.表面处理 :镜面抛光
3.颜色 :亮
4.密封材料：蓝色橡胶
5.防护等级：IP69K

如需获得产品3D模型图，请联系WWW.FORNDLOCK.COM